

低功耗



快速散热



底噪运动



工作稳定

MANUFACTURER

电机专业制造商



台州苏林机电股份有限公司
TAIZHOU SULIN ELECTROMECHANICAL CO., LTD.

台州苏林机电股份有限公司
TAIZHOU SULIN ELECTROMECHANICAL CO., LTD.

手机: 136 0586 5489 (苏经理)

网址: www.tzsulin.com

地址: 台州市大溪镇五峰工业园区4幢1号楼

COMPANY PROFILE

企业简介

台州苏林机电股份有限公司位于浙江省温岭市大溪镇五峰工业园。毗邻甬台温高速G15、104国道，距台州路桥机场18公里，离动车站2公里，交通十分便捷。是一家集设计、生产、销售、服务一体化的新型企业。具有多年生产YY系列风机专用、JY、YE2、YC、YL、YCL、YS经验，拥有完善的电机全自动电脑检测线，先进的制造、装配生产线，专业生产鼎盛牌系列电动机产品。产品通过国家强制性产品CCC认证，出口欧盟CE安全认证。

本公司生产的电机齐全，品种多样，设计先进、选材精良、工艺先进独特，具有优良的性能和使用安全、可靠、经久耐用等优点，产品畅销全国和出口世界各国，得到国内外客户致的好评。


公司视人才为企业的发展之本，以科学的生产管理为主导，关注客户需求，重视客户服务，打造行业品牌。以我们雄厚的人力资本和不断创新意识，定能为维护人类永恒健康创造一个舒适而宁静的环境。公司秉承“质量第一，顾客至上”的原则为客户提供优质的服务，欢迎广大新老客户莅临参观、指导和业务洽谈。



Taizhou Sulin Electromechanical Co., Ltd. is located in Wufeng Industrial Park, Daxi Town, Wenling City, Zhejiang Province. Adjacent to the Yongtaiwen Expressway G15 and National Highway 104, 18 kilometers away from Taizhou Luqiao Airport, and 2 kilometers away from the power station, the transportation is very convenient. It is a new type of enterprise that integrates design, production, sales, and service. With years of experience in producing YY series fans, JY, YE2, YC, YL, YCL, and YS, we have a complete automatic computer inspection line for motors, advanced manufacturing and assembly production lines, and specialize in producing Dingyi brand electric motor products. The product has passed the national mandatory product CCC certification and the export EU CE safety certification.


Our company produces a complete range of motors with diverse varieties, advanced design, excellent material selection, advanced and unique technology, which have excellent performance and advantages such as safe use, reliability, and durability. Our products are popular nationwide and exported to countries around the world, and have received praise from domestic and foreign customers.

The company regards talent as the foundation of enterprise development, takes scientific production management as the leading factor, pays attention to customer needs, values customer service, and creates an industry brand. With our strong human capital and continuous innovation consciousness, we are sure to create a comfortable and peaceful environment for maintaining eternal human health. The company adheres to the principle of "quality first, customer first" to provide customers with high-quality services. We welcome new and old customers to visit, guide and negotiate business.

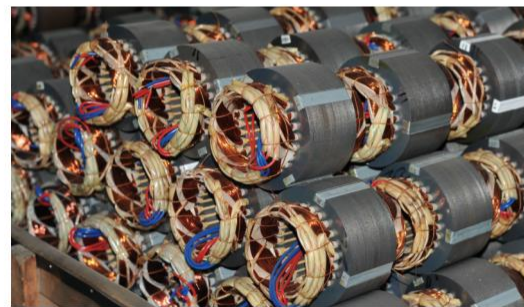

RELIABLE QUALITY

车间和生产设备

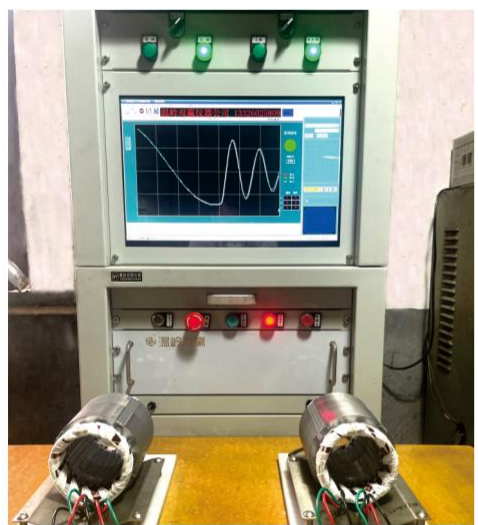

品质源于细节 细节决定成败

给品牌一个世界的高度,对产品的要求就必须有一个国际的标准。

Quality comes from details, details determine success or failure .

To give the brand a global height, the requirements for products must have an international standard.




精益生产 Lean manufacturing

- 标准化 Standardized
- 规范化 Specified
- 目视化 Visualized
- 责任化 Responsibilities
- 常态化 Normalized
- 全员参与 Total Involvement
- 持续改进 Continuous Improvements




COMPANY QUALIFICATION

企业资质

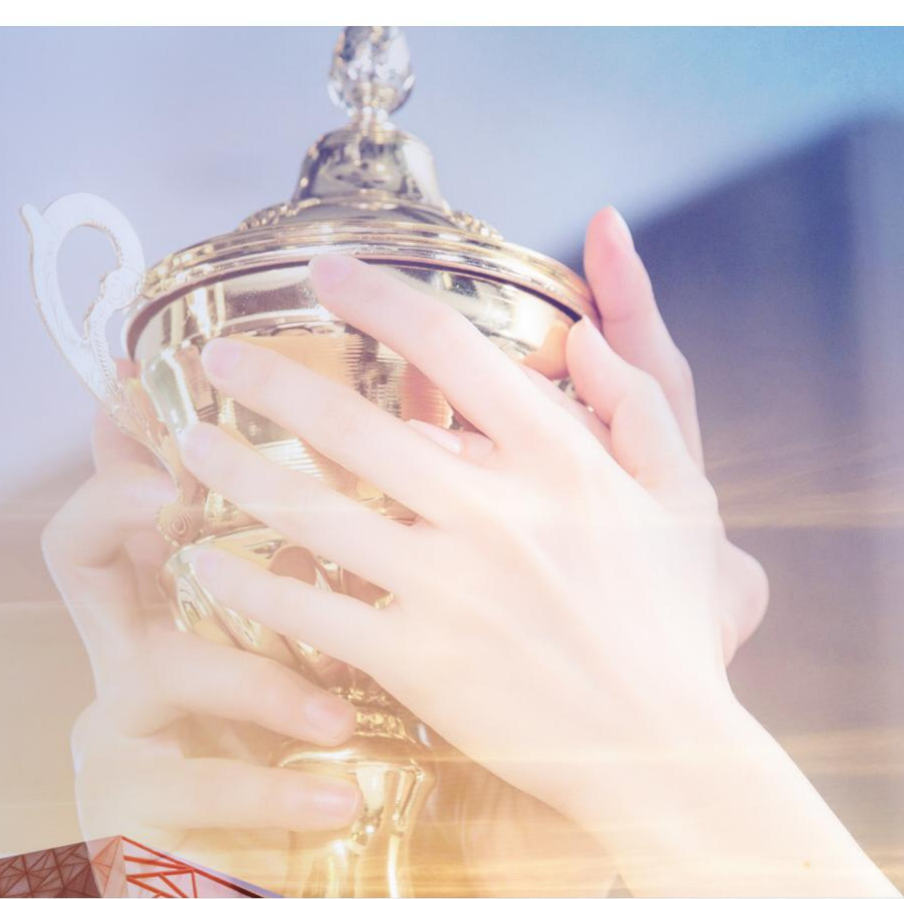

STRENGTH CREATES BRILLIANCE

实力铸就辉煌

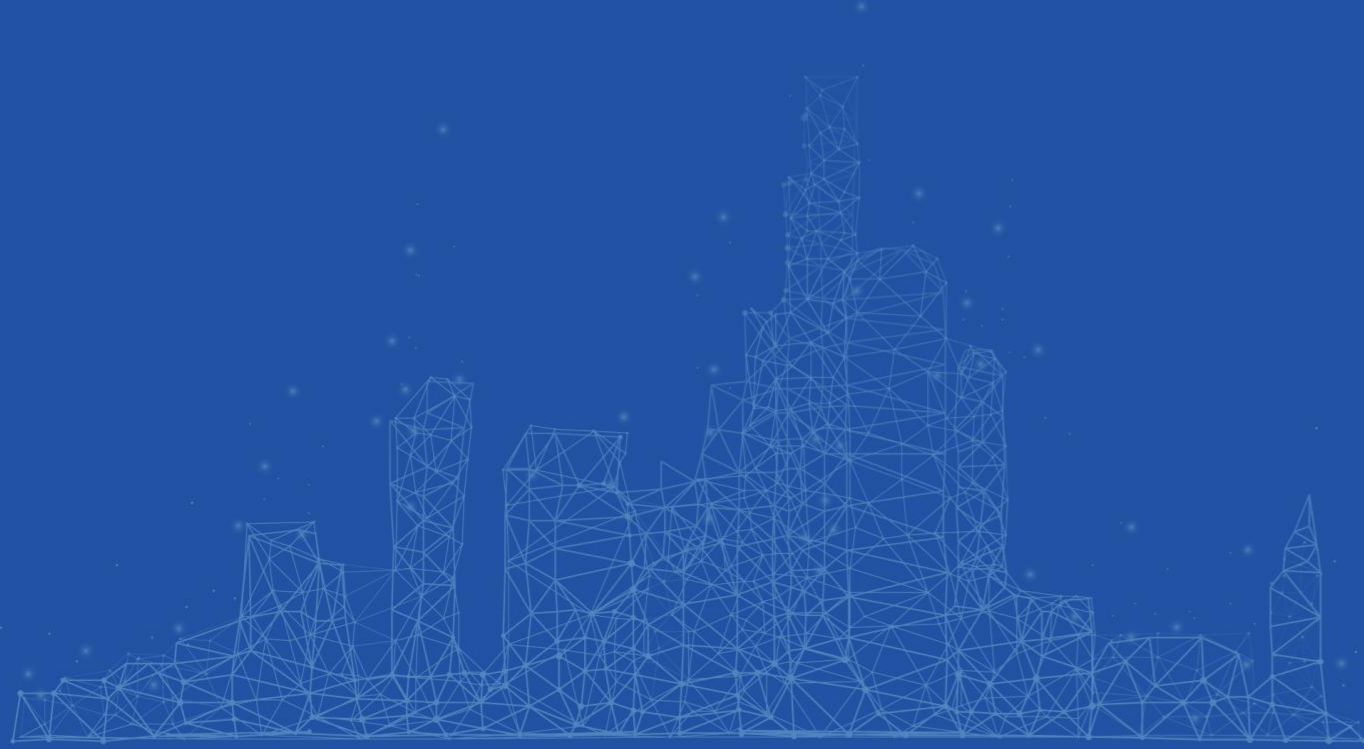

精益求精 追求完美品质

优质高效 创新引领未来

持续改进 超越顾客期望

CORPORATE CULTURE

企业文化



◎ 企业宗旨

今天的质量是明天的市场

◎ 产品定位


利用电机专业设计制造的优势，
艰苦追求，逐步开发高新产品

◎ 成长方向

利用现有的市场渗透，提高市场份额。
利用相关产品的开发，提高产品的技术档次


PRODUCT ANALYSIS DIAGRAM

产品解析图

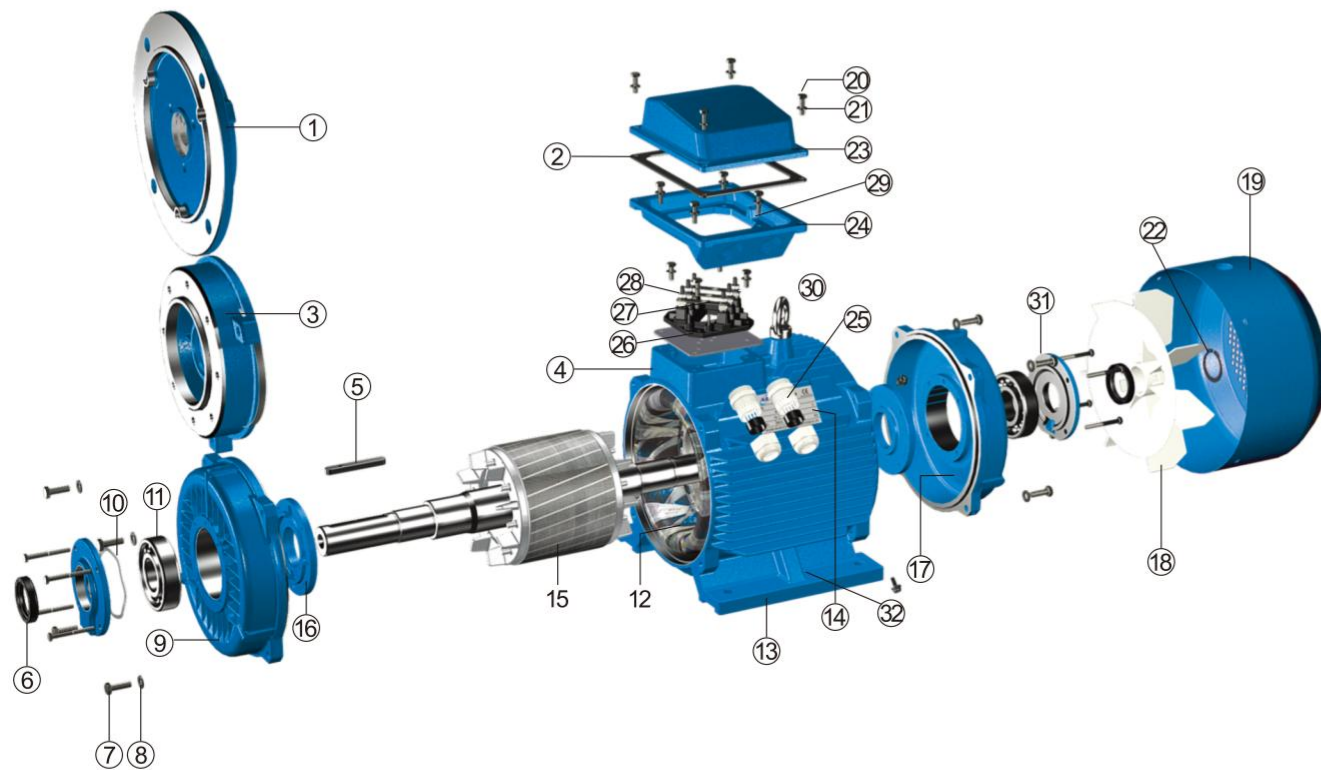

- | | | |
|------------------------|-------------------------------|-----------------------------|
| 1. B5法兰(B5 Flange) | 12. 绕线定子(Stator with Winding) | 23. 接线盒盖(Terminal box lid) |
| 2. 密封垫(Gasket) | 13. 底脚(Feet) | 24. 接线盒座(Terminal box base) |
| 3. B14法兰(B14 Flange) | 14. 铭牌(Nameplate) | 25. 螺母螺套(Cable gland) |
| 4. 机座(Frame) | 15. 转子(Rotor) | 26. 接线板(Terminal board) |
| 5. 轴键(Shaft key) | 16. 内轴承盖(Inner bearing cap) | 27. 铜线接片(Brass lug) |
| 6. 密封圈(V Ring)Oil seal | 17. 后端盖(Rear endshield) | 28. 铜螺帽(Brass nut) |
| 7. 螺栓(Bolt) | 18. 风叶(Fan) | 29. 接地标志(Earth mark) |
| 8. 弹簧垫圈(Spring washer) | 19. 风罩(Fan cover) | 30. 铜垫片(Brass washer) |
| 9. 前端盖(Front cover) | 20. 螺丝(Screw) | 31. 轴承外盖(Outer Bearing cap) |
| 10. 波形圈(Wave washer) | 21. 垫圈(Washer) | 32. 接地标志(Earth mark) |
| 11. 轴承(Bearing) | 22. 风叶卡簧(Fan clamp) | |

CATALOGUE 目录

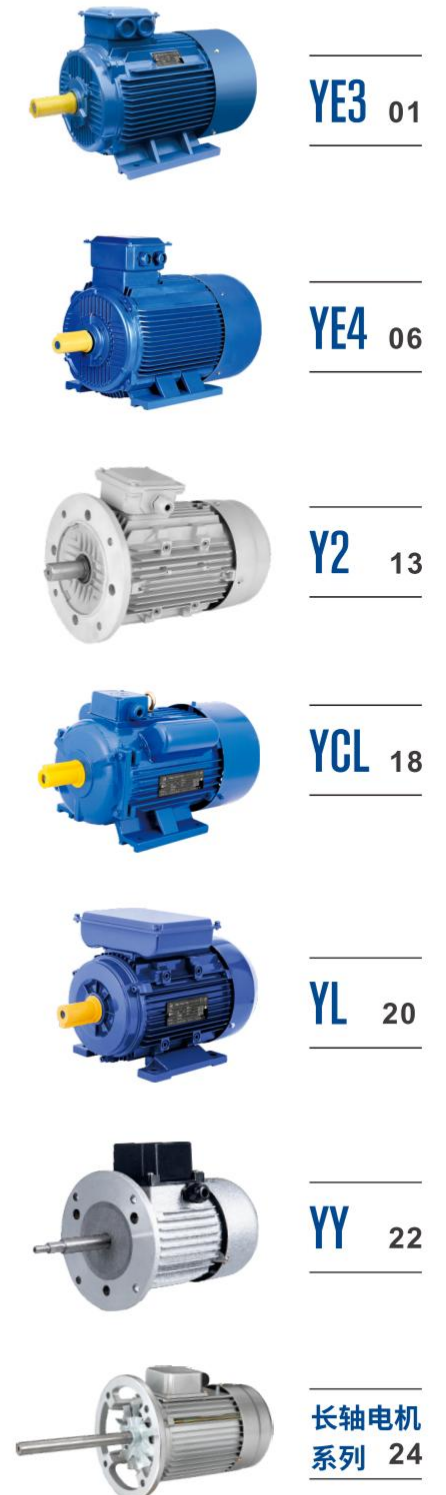




YE3

系列高效三相异步电动机

Series high efficiency three - phase asynchronous motor

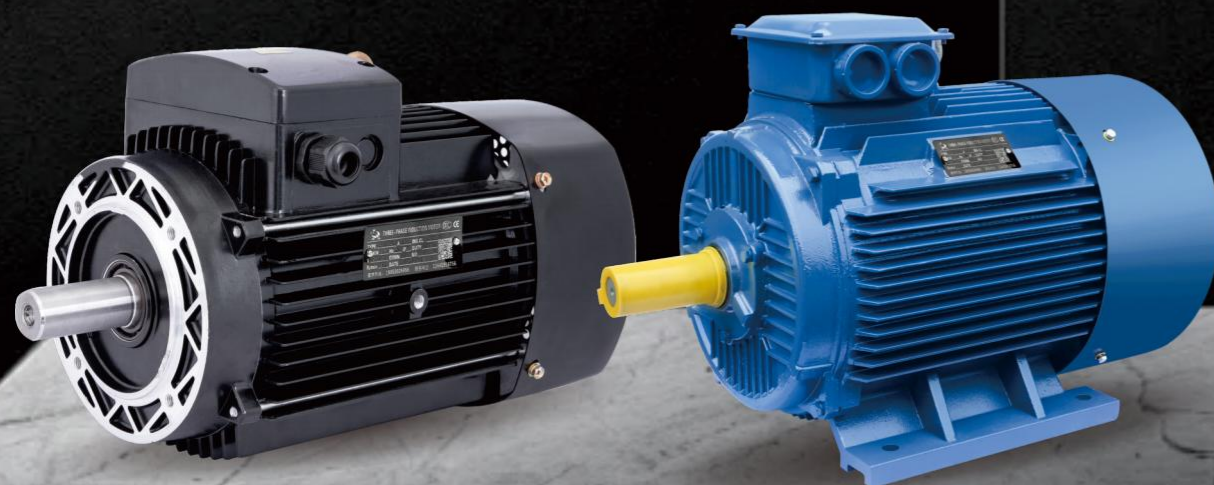

产品概述 PRODUCT OVERVIEW

应用: 广泛应用于国民经济各个领域, 如机床、水泵、风机、压缩机, 也适用于运输、搅拌、印刷、农机、食品等各类不含易燃、易爆或腐蚀性气体的场合。

特点: 外形美观, 高效节能, 噪声低, 振动小, 运行可靠。

使用条件: 海拔不超过1000M, 环境温度随季节变化, 但最高不超过+40℃, 最低不低于-15℃。

Applications: Widely used in all kinds area such as machinery, water pump, air compressor, also suitable to the occasion not contain flammable and explosive gas or corrosive gas while during the transportation, mixing, printing etc.

Features: attractive appearance, high efficiency, energy saving, low noise, little vibration, smooth operation.

Circumstance for use: The altitude not exceeding 1000m above sea level. The ambient temperature subject to seasonal variations but not exceeding +40℃ and not less than -15℃.

DING YI MOTOR



技术数据 TECHNICAL DATA

YE3 (3级能效 GB3)

SPEED 3000RPM 2-POLE 50HZ

High Efficiency (IE3-Cast-iron motor) 50Hz TECHNICAL DATA

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor cosφ	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380	400	415					
YE3-631-2	0.18	0.25	2730	65.9	65.9	64.6	0.80	0.52	0.49	0.47	0.63	2.2	2.2	5.5	9.5
YE3-632-2	0.25	0.37	2730	69.7	69.7	68.3	0.81	0.67	0.64	0.62	0.87	2.2	2.2	5.5	10
YE3-711-2	0.37	0.5	2750	73.8	73.8	72.3	0.81	0.94	0.89	0.86	1.28	2.2	2.2	6.1	11
YE3-712-2	0.55	0.75	2750	77.8	77.8	76.2	0.82	1.31	1.24	1.20	1.91	2.3	2.3	6.1	12.1
YE3-801-2	0.75	1	2880	80.7	80.7	79.1	0.82	1.72	1.64	1.58	2.49	2.3	2.3	7.0	18.1
YE3-802-2	1.1	1.5	2880	82.7	82.7	81.0	0.83	2.43	2.31	2.23	3.65	2.2	2.3	7.3	19.5
YE3-90S-2	1.5	2	2895	84.2	84.2	82.5	0.84	3.22	3.06	2.95	4.95	2.2	2.3	7.6	23.3
YE3-90L-2	2.2	3	2895	85.9	85.9	84.2	0.85	4.58	4.35	4.19	7.26	2.2	2.3	7.6	27.1
YE3-100L-2	3	4	2895	87.1	87.1	85.4	0.87	6.02	5.71	5.51	9.90	2.2	2.3	7.8	38.8
YE3-112M-2	4	5.5	2905	88.1	88.1	86.3	0.88	7.84	7.45	7.18	13.1	2.2	2.3	8.3	48.3
YE3-132S1-2	5.5	7.5	2930	89.2	89.2	87.4	0.88	10.6	10.1	9.75	17.9	2.0	2.3	8.3	55.1
YE3-132S2-2	7.5	10	2930	90.1	90.1	88.3	0.88	14.4	13.7	13.2	24.4	2.0	2.3	7.9	69.2
YE3-160M1-2	11	15	2945	91.2	91.2	89.4	0.89	20.6	19.6	18.9	35.7	2.0	2.3	8.1	113
YE3-160M2-2	15	20	2945	91.9	91.9	90.1	0.89	27.9	26.5	25.5	48.6	2.0	2.3	8.1	123
YE3-160L-2	18.5	25	2940	92.4	92.4	90.6	0.89	34.2	32.5	31.3	60.1	2.0	2.3	8.2	142
YE3-180M-2	22	30	2955	92.7	92.7	90.8	0.89	40.5	38.5	37.1	71.1	2.0	2.3	8.2	182
YE3-200L1-2	30	40	2960	93.3	93.3	91.4	0.89	54.9	52.1	50.3	96.8	2.0	2.3	7.6	246
YE3-200L2-2	37	50	2960	93.7	93.7	91.8	0.89	67.4	64.0	61.7	119.4	2.0	2.3	7.6	265
YE3-225M-2	45	60	2965	94.0	94.0	92.1	0.90	80.8	76.8	74.0	144.9	2.0	2.3	7.7	323
YE3-250M-2	55	75	2970	94.3	94.3	92.4	0.90	98.5	93.5	90.2	176.9	2.0	2.3	7.7	413
YE3-280S-2	75	100	2975	94.7	94.7	92.8	0.90	134	127	122	240.8	1.8	2.3	7.1	546
YE3-280M-2	90	125	2975	95.0	95.0	93.1	0.90	160	152	146	288.9	1.8	2.3	7.1	569
YE3-315S-2	110	150	2978	95.2	95.2	93.3	0.90	195	185	179	352.8	1.8	2.3	7.1	897
YE3-315M-2	132	180	2978	95.4	95.4	93.5	0.90	234	222	214	423.3	1.8	2.3	7.1	1029
YE3-315L1-2	160	200	2980	95.6	95.6	93.7	0.91	279	265	256	512.8	1.8	2.3	7.2	1067
YE3-315L2-2	200	270	2980	95.8	95.8	93.9	0.91	349	331	319	640.9	1.8	2.2	7.2	1194
YE3-355M-2	250	340	2982	95.8	95.8	93.9	0.91	436	414	399	800.6	1.6	2.2	7.2	1685
YE3-355L-2	315	430	2982	95.8	95.8	93.9	0.91	549	522	503	1009	1.6	2.2	7.2	1734



鼎益

DING YI MOTOR

DING YI MOTOR



鼎益

YE3 (3级能效 GB3)

SPEED 1500RPM 4-POLE 50HZ

High Efficiency (IE3-Cast-iron motor) 50Hz TECHNICAL DATA															
型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380	400	415					
YE3-631-4	0.12	0.18	1320	64.8	64.8	63.5	0.72	0.39	0.37	0.36	0.87	2.1	2.2	4.4	9.8
YE3-632-4	0.18	0.25	1320	69.9	69.9	68.5	0.73	0.54	0.51	0.49	1.30	2.1	2.2	4.4	10.5
YE3-711-4	0.25	0.37	1340	73.5	73.5	72.0	0.74	0.70	0.66	0.64	1.78	2.1	2.2	5.2	15.2
YE3-712-4	0.37	0.5	1340	77.3	77.3	75.8	0.75	0.97	0.92	0.89	2.64	2.1	2.2	5.2	16.6
YE3-801-4	0.55	0.75	1400	80.8	80.8	79.2	0.75	1.38	1.31	1.26	3.75	2.4	2.3	5.2	17.6
YE3-802-4	0.75	1	1420	82.5	82.5	80.9	0.75	1.84	1.75	1.69	5.04	2.3	2.3	6.6	18.4
YE3-90S-4	1.1	1.5	1445	84.1	84.1	82.4	0.76	2.61	2.48	2.39	7.27	2.3	2.3	6.8	24.2
YE3-90L-4	1.5	2	1445	85.3	85.3	83.6	0.77	3.47	3.3	3.18	9.91	2.3	2.3	7.0	29.7
YE3-100L1-4	2.2	3	1450	86.7	86.7	85.0	0.81	4.76	4.52	4.36	14.5	2.3	2.3	7.6	41.5
YE3-100L2-4	3	4	1450	87.7	87.7	85.9	0.82	6.34	6.02	5.8	19.8	2.3	2.3	7.6	46
YE3-112M-4	4	5.5	1450	88.6	88.6	86.8	0.82	8.37	7.95	7.66	26.3	2.2	2.3	7.8	63.2
YE3-132S-4	5.5	7.5	1460	89.6	89.6	87.8	0.83	11.2	10.7	10.3	36.0	2.0	2.3	7.9	71.2
YE3-132M-4	7.5	10	1460	90.4	90.4	88.6	0.84	15.0	14.3	13.7	49.1	2.0	2.3	7.5	85.1
YE3-160M-4	11	15	1465	91.4	91.4	89.6	0.85	21.5	20.4	19.7	71.7	2.2	2.3	7.7	121
YE3-160L-4	15	20	1465	92.1	92.1	90.3	0.86	28.8	27.3	26.3	97.8	2.2	2.3	7.8	142
YE3-180M-4	18.5	25	1470	92.6	92.6	90.7	0.86	35.3	33.5	32.3	120.2	2.0	2.3	7.8	181
YE3-180L-4	22	30	1470	93.0	93.0	91.1	0.86	41.8	39.7	38.3	142.9	2.0	2.3	7.8	209
YE3-200L-4	30	40	1475	93.6	93.6	91.7	0.86	56.6	53.8	51.8	194.2	2.0	2.3	7.3	284
YE3-225S-4	37	50	1485	93.9	93.9	92.0	0.86	69.6	66.1	63.7	237.9	2.0	2.3	7.4	328
YE3-225M-4	45	60	1485	94.2	94.2	92.3	0.86	84.4	80.2	77.3	289.4	2.0	2.3	7.4	363
YE3-250M-4	55	75	1485	94.6	94.6	92.7	0.86	103	97.6	94.1	353.7	2.2	2.3	7.4	442
YE3-280S-4	75	100	1486	95.0	95.0	93.1	0.88	136	129	125	482.0	2.0	2.3	6.9	569
YE3-280M-4	90	125	1486	95.2	95.2	93.3	0.88	163	155	149	578.4	2.0	2.3	6.9	639
YE3-315S-4	110	150	1488	95.4	95.4	93.5	0.89	197	187	180	706.0	2.0	2.2	7.0	939
YE3-315M-4	132	180	1488	95.6	95.6	93.7	0.89	236	224	216	847.2	2.0	2.2	7.0	1033
YE3-315L1-4	160	200	1488	95.8	95.8	93.9	0.89	285	271	261	1027	2.0	2.2	7.1	1126
YE3-315L2-4	200	270	1490	96.0	96.0	94.1	0.90	352	334	322	1282	2.0	2.2	7.1	1238
YE3-355M-4	250	340	1490	96.0	96.0	94.1	0.90	440	418	403	1602	2.0	2.2	7.1	1830
YE3-355L-4	315	430	1490	96.0	96.0	94.1	0.90	554	526	507	2019	2.0	2.2	7.1	1950

YE3 (3级能效 GB3)

SPEED 1000RPM 6-POLE 50HZ

High Efficiency (IE3-Cast-iron motor) 50Hz TECHNICAL DATA															
型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380	400	415					
YE3-632-6	0.12	0.18	855	57.7	57.7	56.5	0.60	0.53	0.50	0.48	1.34	1.8	1.9	3.5	10.3
YE3-711-6	0.18	0.25	855	63.9	63.9	62.6	0.66	0.65	0.62	0.59	2.01	1.9	2.0	4.0	11
YE3-712-6	0.25	0.37	855	68.6	68.6	67.2	0.68	0.81	0.77	0.75	2.79	1.9	2.0	4.0	11.5
YE3-801-6	0.37	0.5	890	73.5	73.5	72.0	0.70	1.09	1.04	1.00	3.97	1.9	2.0	4.7	15.2
YE3-802-6	0.55	0.75	890	77.2	77.2	75.7	0.72	1.50	1.43	1.38	5.90	1.9	2.1	4.7	16.6
YE3-90S-6	0.75	1	935	78.9	78.9	77.3	0.71	2.03	1.93	1.86	7.66	2.0	2.1	6.0	24.1
YE3-90L-6	1.1	1.5	945	81.0	81.0	79.4	0.73	2.83	2.69	2.59	11.1	2.0	2.1	6.0	25.7
YE3-100L-6	1.5	2	949	82.5	82.5	80.9	0.73	3.78	3.59	3.47	15.1	2.0	2.1	6.5	34.9
YE3-112M-6	2.2	3	955	84.3	84.3	82.6	0.74	5.36	5.09	4.91	22.0	2.0	2.1	6.6	54.2
YE3-132S-6	3	4	968	85.6	85.6	83.9	0.74	7.20	6.84	6.59	29.6	2.0	2.1	6.8	62.3
YE3-132M1-6	4	5.5	968	86.8	86.8	85.1	0.74	9.46	8.99	8.66	39.5	2.0	2.1	6.8	75.2
YE3-132M2-6	5.5	7.5	968	88.0	88.0	86.2	0.75	12.7	12.0	11.6	54.3	2.0	2.1	7.0	82.3
YE3-160M-6	7.5	10	970	89.1	89.1	87.3	0.79	16.2	15.4	14.8	73.8	2.0	2.1	7.0	112
YE3-160L-6	11	15	970	90.3	90.3	88.5	0.80	23.1	22.0	21.2	108.3	2.0	2.1	7.2	134
YE3-180L-6	15	20	978	91.2	91.2	89.4	0.81	30.9	29.3	28.2	146.5	2.0	2.1	7.3	197
YE3-200L1-6	18.5	25	980	91.7	91.7	89.9	0.81	37.8	35.9	34.7	180.3	2.0	2.1	7.3	234
YE3-200L2-6	22	30	980	92.2	92.2	90.4	0.81	44.8	42.5	41.0	214.4	2.0	2.1	7.4	251
YE3-225M-6	30	40	980	92.9	92.9	91.0	0.83	59.1	56.2	54.1	292.3	2.0	2.1	6.9	308
YE3-250M-6	37	50	985	93.3	93.3	91.4	0.84	71.7	68.1	65.7	358.7	2.0	2.1	7.1	383
YE3-280S-6	45	60	985	93.7	93.7	91.8	0.85	85.8	81.6	78.6	436.3	2.0	2.0	7.3	501
YE3-280M-6	55	75	985	94.1	94.1	92.2	0.86	103	98.1	94.6	533.2	2.0	2.0	7.3	573
YE3-315S-6	75	100	985	94.6	94.6	92.7	0.84	143	136	131	727.2	2.0	2.0	6.6	843
YE3-315M-6	90	125	988	94.9	94.9	93.0	0.85	170	161	155	869.9	2.0	2.0	6.7	941
YE3-315L1-6	110	150	988	95.1	95.1	93.2	0.85	207	196	189	1063	2.0	2.0	6.7	1017
YE3-315L2-6	132	180	988	95.4	95.4	93.5	0.86	244	232	224	1276	2.0	2.0	6.8	1121
YE3-355M1-6	160	200	990	95.6	95.6	93.7	0.86	296	281	271	1543	1.8	2.0	6.8	1715
YE3-355M2-6	200	270	990	95.8	95.8	93.9	0.87	365	346	334	1929	1.8	2.0	6.8	1846
YE3-355L-6	250	340	990	95.8	95.8	93.9	0.87	456	433	417	2412	1.8	2.0	6.8	2085

YE3 (3级能效 GB3)

SPEED 750RPM 8-POLE 50HZ

High Efficiency (IE3-Cast-iron motor) 50Hz TECHNICAL DATA															
型号 Type	额定功率 Rated Output		额定转速 Rated Speed rpm	效率 Efficiency η% (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor cosΦ	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380	400	415					
YE3-712-8	0.12	0.18	605	50.7	50.7	49.7	0.57	0.63	0.60	0.58	1.89	1.8	1.9	2.8	11
YE3-801-8	0.18	0.25	650	58.7	58.7	57.5	0.61	0.76	0.73	0.70	2.64	1.8	1.9	3.3	14.5
YE3-802-8	0.25	0.37	650	64.1	64.1	62.8	0.61	0.97	0.92	0.89	3.67	1.8	1.9	3.3	16.7
YE3-90S-8	0.37	0.5	675	69.3	69.3	67.9	0.61	1.33	1.26	1.22	5.23	1.8	1.9	4.0	28.2
YE3-90L-8	0.55	0.75	675	73.0	73.0	71.5	0.61	1.88	1.78	1.72	7.78	1.8	2.0	4.0	29.7
YE3-100L1-8	0.75	1	685	75.0	75.0	73.5	0.67	2.27	2.15	2.08	10.5	1.8	2.0	4.0	40
YE3-100L2-8	1.1	1.5	685	77.7	77.7	76.1	0.69	3.12	2.96	2.85	15.3	1.8	2.0	5.0	41.4
YE3-112M-8	1.5	2	695	79.7	79.7	78.1	0.70	4.08	3.88	3.74	20.6	1.8	2.0	5.0	57.5
YE3-132S-8	2.2	3	710	81.9	81.9	80.3	0.71	5.75	5.46	5.26	29.6	1.8	2.0	6.0	74.8
YE3-132M-8	3	4	710	83.5	83.5	81.8	0.73	7.48	7.10	6.85	40.4	1.8	2.0	6.0	89.1
YE3-160M1-8	4	5.5	725	84.8	84.8	83.1	0.73	9.82	9.33	8.99	52.7	1.9	2.0	6.0	101
YE3-160M2-8	5.5	7.5	725	86.2	86.2	84.5	0.74	13.1	12.4	12.0	72.4	1.9	2.0	6.0	126.5
YE3-160L-8	7.5	10	725	87.3	87.3	85.6	0.75	17.4	16.5	15.9	98.8	1.9	2.0	6.0	136
YE3-180L-8	11	15	735	88.6	88.6	86.8	0.75	25.2	23.9	23.0	142.9	2.0	2.0	6.5	198
YE3-200L-8	15	20	730	89.6	89.6	87.8	0.76	33.5	31.8	30.6	196.2	2.0	2.0	6.6	234
YE3-225S-8	18.5	25	730	90.1	90.1	88.3	0.76	41.0	39.0	37.6	242.0	1.9	2.0	6.6	284
YE3-225M-8	22	30	730	90.6	90.6	88.8	0.78	47.3	44.9	43.3	287.8	1.9	2.0	6.6	325
YE3-250M-8	30	40	735	91.3	91.3	89.5	0.79	63.2	60.0	57.9	389.8	1.9	2.0	6.5	425
YE3-280S-8	37	50	735	91.8	91.8	90.0	0.79	77.5	73.6	71.0	480.7	1.9	2.0	6.6	518
YE3-280M-8	45	60	735	92.2	92.2	90.4	0.79	93.9	89.2	85.9	584.7	1.9	2.0	6.6	582
YE3-315S-8	55	75	735	92.5	92.5	90.7	0.81	112	106	102	714.6	1.8	2.0	6.6	852
YE3-315M-8	75	100	735	93.1	93.1	91.2	0.81	151	144	138	974.5	1.8	2.0	6.2	952
YE3-315L1-8	90	125	735	93.4	93.4	91.5	0.82	179	170	163	1169	1.8	2.0	6.4	1040
YE3-315L2-8	110	150	735	93.7	93.7	91.8	0.82	218	207	199	1429	1.8	2.0	6.4	1056
YE3-355M1-8	132	180	740	94.0	94.0	92.1	0.82	260	247	238	1704	1.8	2.0	6.4	1784
YE3-355M2-8	160	220	740	94.3	94.3	92.4	0.82	314	299	288	2065	1.8	2.0	6.4	1941
YE3-355L-8	200	270	740	94.6	94.6	92.7	0.83	387	368	354	2581	1.8	2.0	6.4	2026

YE4 系列高效三相异步电动机

Series high efficiency three - phase asynchronous motor



产品概述 PRODUCT OVERVIEW

应用: 适用于驱动各种通用机械设备, 如压缩机, 风机、水泵等机械设备, 也可在石油、化工、医药、矿山等。

特点: 高效节能, 外形美观、使用方便、振动小, 噪音低, 结构新颖。

使用条件: 海拔不超过1000M, 环境温度随季节变化, 但最高不超过+40℃, 最低不低于-15℃。

Application: Applicable to drive all kinds of general machinery and equipment, such as compressors, fans, pumps and other mechanical equipment, but also in the oil, chemicals, medicine, mining, etc.

Features: High efficiency, energy saving, attractive appearance, convenient operation, perfect structure, little vibration, low noise.

Circumstance for use: The altitude not exceeding 1000m above sea level. The ambient temperature subject to seasonal variations but not exceeding +40℃ and not less than -15℃.



鼎益

DING YI MOTOR

DING YI MOTOR



鼎益

技术数据 TECHNICAL DATA

YE4 (2级能效GB2)

SPEED 3000RPM 2-POLE 50HZ

High Efficiency (IE4-Cast-iron motor) 50Hz TECHNICAL DATA															
型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE4)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor cosΦ	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380	400	415					
YE4-631-2	0.18	0.25	2745	70.8	70.8	69.4	0.80	0.48	0.46	0.44	0.63	2.2	2.2	5.5	11.3
YE4-632-2	0.25	0.37	2745	74.3	74.3	72.8	0.81	0.63	0.60	0.58	0.87	2.2	2.2	5.5	11.8
YE4-711-2	0.37	0.5	2765	78.1	78.1	76.5	0.81	0.89	0.84	0.81	1.28	2.2	2.2	6.1	13.2
YE4-712-2	0.55	0.75	2765	81.5	81.5	79.9	0.82	1.25	1.19	1.14	1.90	2.3	2.3	6.1	14.5
YE4-801-2	0.75	1	2910	83.5	83.5	81.8	0.82	1.66	1.58	1.52	2.46	2.3	2.3	7.0	20
YE4-802-2	1.1	1.5	2920	85.2	85.2	83.5	0.83	2.36	2.25	2.16	3.60	2.2	2.3	7.3	21
YE4-90S-2	1.5	2	2930	86.5	86.5	84.8	0.84	3.14	2.98	2.87	4.89	2.2	2.3	7.6	24
YE4-90L-2	2.2	3	2930	88.0	88.0	86.2	0.85	4.47	4.25	4.09	7.17	2.2	2.3	7.6	29
YE4-100L-2	3	4	2935	89.1	89.1	87.3	0.87	5.88	5.59	5.38	9.76	2.2	2.3	7.8	37
YE4-112M-2	4	5.5	2940	90.0	90.0	88.2	0.88	7.67	7.29	7.03	13.0	2.2	2.3	8.3	48
YE4-132S1-2	5.5	7.5	2945	90.9	90.9	89.1	0.88	10.4	9.9	9.57	17.8	2.0	2.3	8.3	76
YE4-132S2-2	7.5	10	2950	91.7	91.7	89.9	0.88	14.1	13.4	12.9	24.3	2.0	2.3	7.9	85
YE4-160M1-2	11	15	2960	92.6	92.6	90.7	0.89	20.3	19.3	18.6	35.5	2.0	2.3	8.1	133
YE4-160M2-2	15	20	2960	93.3	93.3	91.4	0.89	27.4	26.1	25.1	48.4	2.0	2.3	8.1	146
YE4-160L-2	18.5	25	2960	93.7	93.7	91.8	0.89	33.7	32.0	30.9	59.7	2.0	2.3	8.2	160
YE4-180M-2	22	30	2965	94.0	94.0	92.1	0.89	40.0	38.0	36.6	70.9	2.0	2.3	8.2	221
YE4-200L1-2	30	40	2970	94.5	94.5	92.6	0.89	54.2	51.5	49.6	96.5	2.0	2.3	7.6	260
YE4-200L2-2	37	50	2970	94.8	94.8	92.9	0.89	66.6	63.3	61.0	119.0	2.0	2.3	7.6	309
YE4-225M-2	45	60	2975	95.0	95.0	93.1	0.90	80.0	76.0	73.2	144.5	2.0	2.3	7.7	370
YE4-250M-2	55	75	2975	95.3	95.3	93.4	0.90	97.4	92.6	89.2	176.6	2.0	2.3	7.7	520
YE4-280S-2	75	100	2980	95.6	95.6	93.7	0.90	132	126	121	240.4	1.8	2.3	7.1	570
YE4-280M-2	90	125	2982	95.8	95.8	93.9	0.90	159	151	145	288.2	1.8	2.3	7.1	630
YE4-315S-2	110	150	2980	96.0	96.0	94.1	0.90	193	184	177	352.5	1.8	2.3	7.1	985
YE4-315M-2	132	180	2980	96.2	96.2	94.3	0.90	232	220	212	423.0	1.8	2.3	7.1	1050
YE4-315L1-2	160	200	2980	96.3	96.3	94.4	0.91	277	264	254	512.8	1.8	2.3	7.2	1160
YE4-315L2-2	200	270	2980	96.5	96.5	94.6	0.91	346	329	317	640.9	1.8	2.2	7.2	1200
YE4-355M-2	250	340	2985	96.5	96.5	94.6	0.91	433	411	396	799.8	1.6	2.2	7.2	2050
YE4-355L-2	315	430	2982	96.5	96.5	94.6	0.91	545	518	499	1009	1.6	2.2	7.2	2380

YE4 (2级能效GB2)

SPEED 1500RPM 4-POLE 50HZ

High Efficiency (IE4-Cast-iron motor) 50Hz TECHNICAL DATA															
型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE4)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor cosΦ	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380	400	415					
YE4-631-4	0.12	0.18	1340	69.8	69.8	68.4	0.72	0.36	0.34	0.33	0.86	2.1	2.2	4.4	11.8
YE4-632-4	0.18	0.25	1340	74.7	74.7	73.2	0.73	0.50	0.48	0.46	1.28	2.1	2.2	4.4	12.6
YE4-711-4	0.25	0.37	1355	77.9	77.9	76.3	0.74	0.66	0.63	0.6	1.76	2.1	2.2	5.2	18
YE4-712-4	0.37	0.5	1355	81.1	81.1	79.5	0.75	0.92	0.88	0.85	2.61	2.1	2.2	5.2	19.5
YE4-801-4	0.55	0.75	1420	83.9	83.9	82.2	0.75	1.33	1.26	1.22	3.70	2.4	2.3	5.2	21
YE4-802-4	0.75	1	1430	85.7	85.7	84.0	0.75	1.77	1.68	1.62	5.01	2.3	2.3	6.6	24
YE4-90S-4	1.1	1.5	1445	87.2	87.2	85.5	0.76	2.52	2.40	2.31	7.27	2.3	2.3	6.8	30
YE4-90L-4	1.5	2	1450	88.2	88.2	86.4	0.77	3.36	3.19	3.07	9.88	2.3	2.3	7.0	34
YE4-100L1-4	2.2	3	1455	89.5	89.5	87.7	0.81	4.61	4.38	4.22	14.4	2.3	2.3	7.6	47
YE4-100L2-4	3	4	1455	90.4	90.4	88.6	0.82	6.15	5.84	5.63	19.7	2.3	2.3	7.6	53
YE4-112M-4	4	5.5	1460	91.1	91.1	89.3	0.82	8.14	7.73	7.45	26.2	2.2	2.3	7.8	60
YE4-132S-4	5.5	7.5	1470	91.9	91.9	90.1	0.83	11.0	10.4	10.0	35.7	2.0	2.3	7.9	85
YE4-132M-4	7.5	10	1470	92.6	92.6	90.7	0.84	14.6	13.9	13.4	48.7	2.0	2.3	7.5	96
YE4-160M-4	11	15	1475	93.3	93.3	91.4	0.85	21.1	20.0	19.3	71.2	2.2	2.3	7.7	146
YE4-160L-4	15	20	1475	93.9	93.9	92.0	0.86	28.2	26.8	25.8	97.1	2.2	2.3	7.8	156
YE4-180M-4	18.5	25	1480	94.2	94.2	92.3	0.86	34.7	33.0	31.8	119.4	2.0	2.3	7.8	181
YE4-180L-4	22	30	1480	94.5	94.5	92.6	0.86	41.1	39.1	37.7	142.0	2.0	2.3	7.8	209
YE4-200L-4	30	40	1480	94.9	94.9	93.0	0.86	55.8	53.1	51.1	193.6	2.0	2.3	7.3	280
YE4-225S-4	37	50	1485	95.2	95.2	93.3	0.86	68.7	65.2	62.9	237.9	2.0	2.3	7.4	373
YE4-225M-4	45	60	1485	95.4	95.4	93.5	0.86	83.3	79.2	76.3	289.4	2.0	2.3	7.4	390
YE4-250M-4	55	75	1485	95.7	95.7	93.8	0.86	102	96.5	93.0	353.7	2.2	2.3	7.4	553
YE4-280S-4	75	100	1490	96.0	96.0	94.1	0.88	135	128	124	480.7	2.0	2.3	6.9	655
YE4-280M-4	90	125	1490	96.1	96.1	94.2	0.88	162	154	148	576.8	2.0	2.3	6.9	730
YE4-315S-4	110	150	1490	96.3	96.3	94.4	0.89	195	185	179	705.0	2.0	2.2	7.0	980
YE4-315M-4	132	180	1490	96.4	96.4	94.5	0.89	234	222	214	846.0	2.0	2.2	7.0	1031
YE4-315L1-4	160	200	1490	96.6	96.6	94.7	0.89	283	269	259	1026	2.0	2.2	7.1	1093
YE4-315L2-4	200	270	1490	96.7	96.7	94.8	0.90	349	332	320	1282	2.0	2.2	7.1	1190
YE4-355M-4	250	340	1490	96.7	96.7	94.8	0.90	436	415	400	1602	2.0	2.2	7.1	1754
YE4-355L-4	315	430	1490	96.7	96.7	94.8	0.90	550	522	504	2019	2.0	2.2	7.1	1960



鼎益

DING YI MOTOR

DING YI MOTOR



鼎益

YE4 (2级能效GB2)

SPEED 1000RPM 6-POLE 50HZ

High Efficiency (IE4-Cast-iron motor) 50Hz TECHNICAL DATA															
型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE4)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380	400	415					
YE4-632-6	0.12	0.18	860	64.9	64.9	63.6	0.60	0.47	0.44	0.43	1.33	1.8	1.9	3.5	12.3
YE4-711-6	0.18	0.25	860	70.1	70.1	68.7	0.66	0.59	0.56	0.54	2.00	1.9	2.0	4.0	13.3
YE4-712-6	0.25	0.37	860	74.1	74.1	72.6	0.68	0.75	0.72	0.69	2.78	1.9	2.0	4.0	13.8
YE4-801-6	0.37	0.5	895	78.0	78.0	76.4	0.70	1.03	0.98	0.94	3.95	1.9	2.0	4.7	18.2
YE4-802-6	0.55	0.75	895	80.9	80.9	79.3	0.72	1.43	1.36	1.31	5.87	1.9	2.1	4.7	20
YE4-90S-6	0.75	1	950	82.7	82.7	81.0	0.71	1.94	1.84	1.78	7.54	2.0	2.1	6.0	28
YE4-90L-6	1.1	1.5	955	84.5	84.5	82.8	0.73	2.71	2.57	2.48	11.0	2.0	2.1	6.0	32
YE4-100L-6	1.5	2	960	85.9	85.9	84.2	0.73	3.63	3.45	3.33	14.9	2.0	2.1	6.5	40
YE4-112M-6	2.2	3	965	87.4	87.4	85.7	0.74	5.17	4.91	4.73	21.8	2.0	2.1	6.6	56
YE4-132S-6	3	4	970	88.6	88.6	86.8	0.74	6.95	6.60	6.37	29.5	2.0	2.1	6.8	78
YE4-132M1-6	4	5.5	975	89.5	89.5	87.7	0.74	9.18	8.72	8.40	39.2	2.0	2.1	6.8	89
YE4-132M2-6	5.5	7.5	975	90.5	90.5	88.7	0.75	12.3	11.7	11.3	53.9	2.0	2.1	7.0	102
YE4-160M-6	7.5	10	980	91.3	91.3	89.5	0.79	15.8	15.0	14.5	73.1	2.0	2.1	7.0	140
YE4-160L-6	11	15	980	92.3	92.3	90.5	0.80	22.6	21.5	20.7	107.2	2.0	2.1	7.2	160
YE4-180L-6	15	20	985	92.9	92.9	91.0	0.81	30.3	28.8	27.7	145.4	2.0	2.1	7.3	245
YE4-200L1-6	18.5	25	985	93.4	93.4	91.5	0.81	37.2	35.3	34.0	179.4	2.0	2.1	7.3	265
YE4-200L2-6	22	30	985	93.7	93.7	91.8	0.81	44.0	41.8	40.3	213.3	2.0	2.1	7.4	285
YE4-225M-6	30	40	990	94.2	94.2	92.3	0.83	58.3	55.4	53.4	289.4	2.0	2.1	6.9	335
YE4-250M-6	37	50	990	94.5	94.5	92.6	0.84	70.8	67.3	64.8	356.9	2.0	2.1	7.1	471
YE4-280S-6	45	60	990	94.8	94.8	92.9	0.85	84.8	80.6	77.7	434.1	2.0	2.0	7.3	530
YE4-280M-6	55	75	990	95.1	95.1	93.2	0.86	102	97.1	93.6	530.6	2.0	2.0	7.3	670
YE4-315S-6	75	100	990	95.4	95.4	93.5	0.84	142	135	130	723.5	2.0	2.0	6.6	960
YE4-315M-6	90	125	990	95.6	95.6	93.7	0.85	168	160	154	868.2	2.0	2.0	6.7	1070
YE4-315L1-6	110	150	990	95.8	95.8	93.9	0.85	205	195	188	1061	2.0	2.0	6.7	1160
YE4-315L2-6	132	180	990	96.0	96.0	94.1	0.86	243	231	222	1273	2.0	2.0	6.8	1250
YE4-355M1-6	160	200	990	96.2	96.2	94.3	0.86	294	279	269	1543	1.8	2.0	6.8	1780
YE4-355M2-6	200	270	990	96.3	96.3	94.4	0.87	363	345	332	1929	1.8	2.0	6.8	1900
YE4-355L-6	250	340	990	96.5	96.5	94.6	0.87	452	430	414	2412	1.8	2.0	6.8	2100


YE4 (2级能效GB2)

SPEED 750RPM 8-POLE 50HZ


High Efficiency (IE4-Cast-iron motor) 50Hz TECHNICAL DATA															
型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE4)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380	400	415					
YE4-712-8	0.12	0.18	610	62.3	62.3	61.1	0.57	0.51	0.49	0.47	1.88	1.8	1.9	2.8	13
YE4-801-8	0.18	0.25	655	67.2	67.2	65.9	0.61	0.67	0.63	0.61	2.62	1.8	1.9	3.3	17.4
YE4-802-8	0.25	0.37	655	70.8	70.8	69.4	0.61	0.88	0.84	0.81	3.65	1.8	1.9	3.3	20
YE4-90S-8	0.37	0.5	680	74.3	74.3	72.8	0.61	1.24	1.18	1.14	5.20	1.8	1.9	4.0	34
YE4-90L-8	0.55	0.75	680	77.0	77.0	75.5	0.61	1.78	1.69	1.63	7.72	1.8	2.0	4.0	35.5
YE4-100L1-8	0.75	1	700	78.4	78.4	76.8	0.67	2.17	2.06	1.99	10.2	1.8	2.0	4.0	40
YE4-100L2-8	1.1	1.5	700	80.8	80.8	79.2	0.69	3.00	2.85	2.74	15.0	1.8	2.0	5.0	45
YE4-112M-8	1.5	2	710	82.6	82.6	80.9	0.70	3.94	3.74	3.61	20.2	1.8	2.0	5.0	50
YE4-132S-8	2.2	3	720	84.5	84.5	82.8	0.71	5.57	5.29	5.10	29.2	1.8	2.0	6.0	78
YE4-132M-8	3	4	720	85.9	85.9	84.2	0.73	7.27	6.91	6.66	39.8	1.8	2.0	6.0	88
YE4-160M1-8	4	5.5	730	87.1	87.1	85.4	0.73	9.56	9.08	8.75	52.3	1.9	2.0	6.0	138
YE4-160M2-8	5.5	7.5	730	88.3	88.3	86.5	0.74	12.8	12.1	11.7	72.0	1.9	2.0	6.0	150
YE4-160L-8	7.5	10	730	89.3	89.3	87.5	0.75	17.0	16.2	15.6	98.1	1.9	2.0	6.0	170
YE4-180L-8	11	15	735	90.4	90.4	88.6	0.75	24.7	23.4	22.6	142.9	2.0	2.0	6.5	230
YE4-200L-8	15	20	735	91.2	91.2	89.4	0.76	32.9	31.2	30.1	194.9	2.0	2.0	6.6	280
YE4-225S-8	18.5	25	735	91.7	91.7	89.9	0.76	40.3	38.2	36.9	240.4	1.9	2.0	6.6	302
YE4-225M-8	22	30	735	92.1	92.1	90.3	0.78	46.5	44.2	42.6	285.9	1.9	2.0	6.6	335
YE4-250M-8	30	40	735	92.7	92.7	90.8	0.79	62.2	59.1	57.0	389.8	1.9	2.0	6.5	400
YE4-280S-8	37	50	740	93.1	93.1	91.2	0.79	76.4	72.6	70.0	477.5	1.9	2.0	6.6	520
YE4-280M-8	45	60	740	93.4	93.4	91.5	0.79	92.7	88.0	84.8	580.7	1.9	2.0	6.6	600
YE4-315S-8	55	75	740	93.7	93.7	91.8	0.81	110	105	101	709.8	1.8	2.0	6.6	1010
YE4-315M-8	75	100	740	94.2	94.2	92.3	0.81	149	142	137	967.9	1.8	2.0	6.2	1140
YE4-315L1-8	90	125	740	94.4	94.4	92.5	0.82	177	168	162	1161	1.8	2.0	6.4	1175
YE4-315L2-8	110	150	740	94.7	94.7	92.8	0.82	215	204	197	1420	1.8	2.0	6.4	1210
YE4-355M1-8	132	180	740	94.9	94.9	93.0	0.82	258	245	236	1704	1.8	2.0	6.4	2050
YE4-355M2-8	160	220	740	95.1	95.1	93.2	0.82	312	296	285	2065	1.8	2.0	6.4	2200
YE4-355L-8	200	270	740	95.4	95.4	93.5	0.83	384	365	351	2581	1.8	2.0	6.4	2300

外形及安装尺寸 DIMENSIONS(mm)

B14

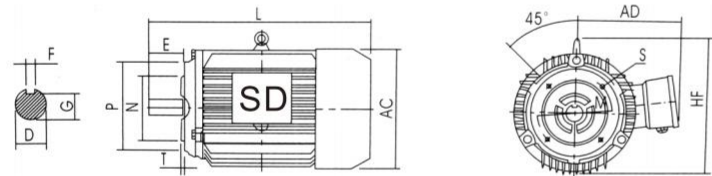


B34

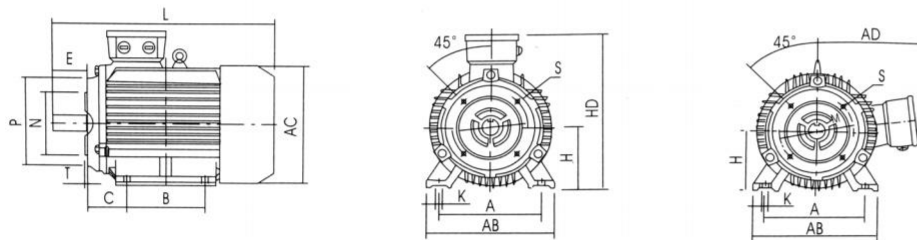


机座号 Frame	级数 Pole	安装尺寸/Mounting Dimension															外形尺寸/Dimensions						
		A	B	C	D	E	F	G	H	M	N	P	R	S	T	K	凸缘孔数	AB	AC	AD	HD	HF	L
63M	2.4	100	80	40	11	23	4	8.5	63	75	60	90	0	M5	2.5	7	4	135	130	70	180	130	230
71M	2.4.6	112	90	45	14	30	5	11	71	85	70	105	0	M6	2.5	7	4	150	145	80	195	145	255
80M	2.4.6.8	125	100	50	19	40	6	15.5	80	100	80	120	0	M6	3	10	4	165	175	145	214	185	295
90S	2.4.6.8	140	100	56	24	50	8	20	90	115	95	140	0	M8	3	10	4	180	195	155	250	195	320
90L	2.4.6.8	140	125	56	24	50	8	20	90	115	95	140	0	M8	3	10	4	180	195	155	250	195	345
100L	2.4.6.8	160	140	63	28	60	8	24	100	130	110	160	0	M8	3.5	12	4	205	215	180	270	245	385
112M	2.4.6.8	190	140	70	28	60	8	24	112	130	110	160	0	M8	3.5	12	4	230	240	190	300	265	400

外形及安装尺寸 DIMENSIONS(mm)


B3

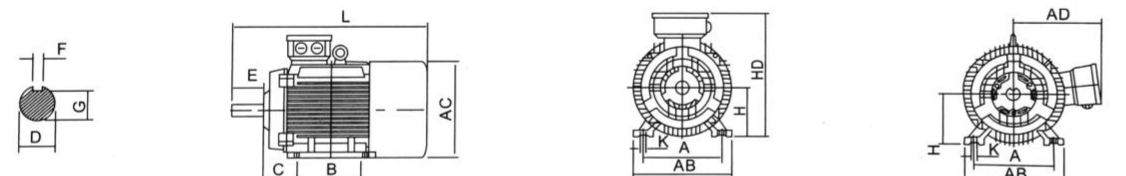

B5

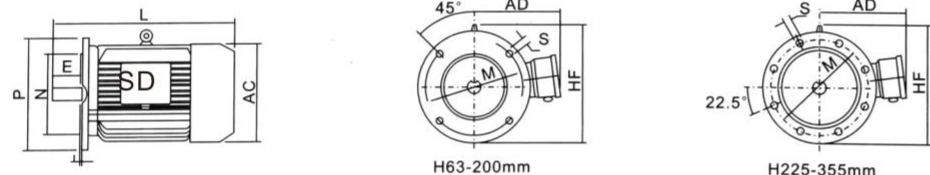

B35

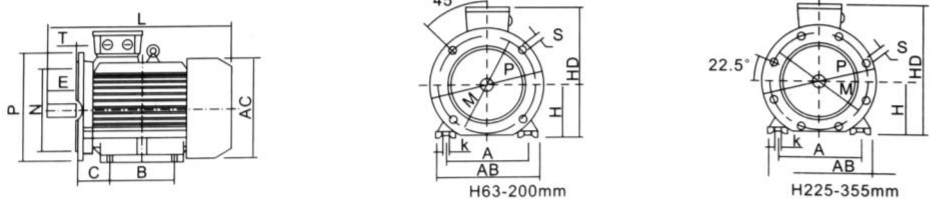


机座号 Frame	级数 Pole	安装尺寸/Mounting Dimension															外形尺寸/Overall Dimension						
		A	B	C	D	E	F	G	H	K	M	N	P	S	T	AB	AC	AD	HD	HF	L		
63M	2.4	100	80	40	11	23	4	8.5	63	75	60	90	0	M5	2.5	7	4	135	130	70	180	130	230
71M	2.4.6	112	90	45	14	30	5	11	71	85	70	105	0	M6	2.5	7	4	150	145	80	195	145	255
80M	2.4.6.8	125	100	50	19	40	6	15.5	80	100	80	120	0	M6	3	10	4	165	175	145	214	185	295
90S	2.4.6.8	140	100	56	24	50	8	20	90	115	95	140	0	M8	3	10	4	180	195	155	250	195	320
90L	2.4.6.8	140	125	56	24	50	8	20	90	115	95	140	0	M8	3	10	4	180	195	155	250	195	345
100L	2.4.6.8	160	140	63	28	60	8	24	100	130	110	160	0	M8	3.5	12	4	205	215	180	270	245	385
112M	2.4.6.8	190	140	70	28	60	8	24	112	130	110	160	0	M8	3.5	12	4	230	240	190	300	265	400
132S	2.4.6.8	216	140	89	38	80	10	33	132	155	130	200	12	M8	4	15	4	270	275	210	345	315	470
132M	2.4.6.8	216	178	89	38	80	10	33	132	155	130	200	12	M8	4	15	4	270	275	210	345	315	510
160M	2.4.6.8	254	210	108	42	110	12	37	160	185	160	230	15	M8	5	19	5	320	330	255	420	385	615
160L	2.4.6.8	254	254	108	42	110	12	37	160	185	160	230	15	M8	5	19	5	320	330	255	420	385	670
180M	2.4.6.8	279	241	121	48	110	14	42.5	180	205	180	250	19	M8	5	21	5	355	380	280	455	430	700
180L	2.4.6.8	279	279	121	48	110	14	42.2	180	205	180	250	19	M8	5	21	5	355	380	280	455	430	740
200L	2.4.6.8	318	305	133	55	110	16	49	200	225	200	300	19	M8	5	23	5	395	420	305	505	480	770
225S	4.8	356	286	149	60	140	18	53	225	255	230	350	19	M8	5	25	5	425	470	335	560	535	815
225M	2				55	110	16	49					19	M8	5	23	5	435	470	335	560	535	820
	4.6.8	356	311	149	60	140	18	53					19	M8	5	23	5	435	470	335	560	535	845
250M	2				60	140	18	53					19	M8	5	23	5	490	510	370	615	595	910
	4.6.8	406	349	168	65	140	18	58					19	M8	5	23	5	490	510	370	615	595	910
280S	2				65	140	18	58					19	M8	5	23	5	550	580	410	680	650	985
	4.6.8	457	368	190	75	140	20	67.5					19	M8	5	23	5	550	580	410	680	650	985
280M	2				65	140	18	58					19	M8	5	23	5	550	580	410	680	650	1035
	4.6.8	457	419	190	75	140	20	67.5					19	M8	5	23	5	550	580	410	680	650	1035
315S	2				65	140	18	58					24	M8	6	25	6	635	645	530	845	-	1160
	4.6.8.10	508	406	216	80	170	22	71					24	M8	6	25	6	635	645	530	845	-	1270
315M	2				65	140	18	58					24	M8	6	25	6	635	645	530	845	-	1190
	4.6.8.10	508	457	216	80	170	22	71					24	M8	6	25	6	635	645	530	845	-	1300
315L	2				65	140	18	58					24	M8	6	25	6	635	645	530	845	-	1190
	4.6.8.10	508	508	216	80	170	22	71					24	M8	6	25	6	635	645	530	845	-	1300
355M	2				75	140	20	67.5					24	M8	6	25	6	730	710	655	1010	-	1500
	4.6.8.10	610	560	254	95	170	25	86					24	M8	6	25	6	730	710	655	1010	-	1530
355L	2				75	140	20	67.5					24	M8	6	25	6	730	710	655	1010	-	1500
	4.6.8.10	610	630	254	95	170	25	86					24	M8	6	25	6	730	710	655	1010	-	1530



Y2

系列铝壳三相异步电动机

Series aluminum shell three-phase asynchronous motor

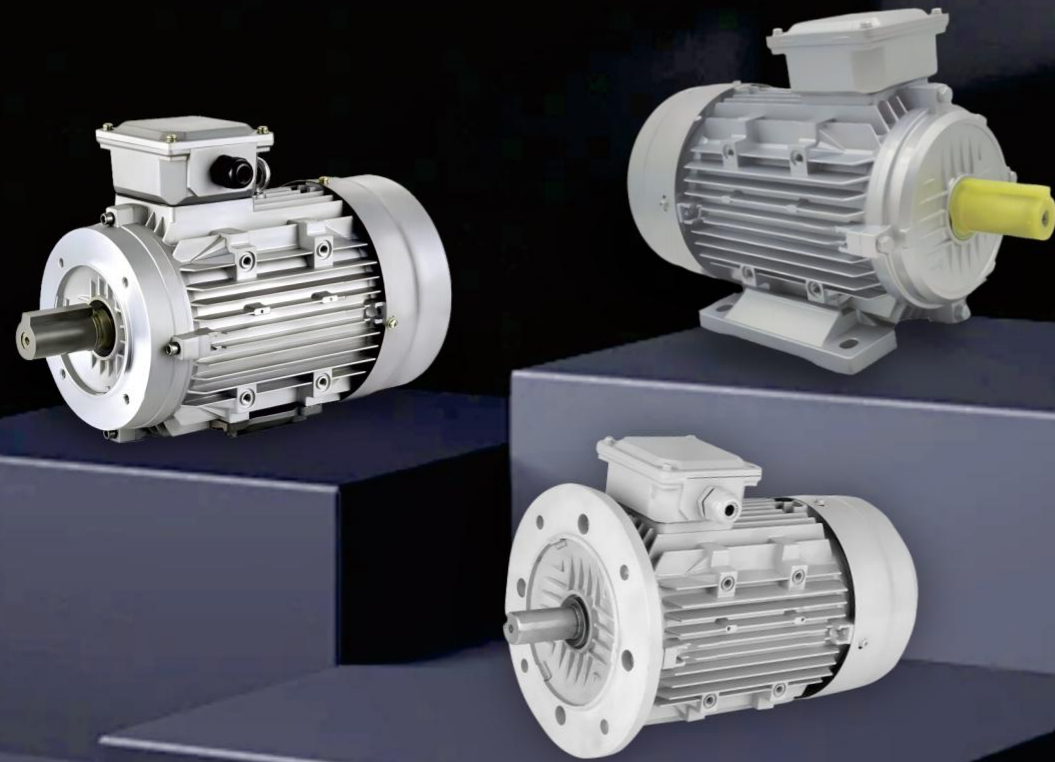

产品概述 PRODUCT OVERVIEW

Y2系列三相异步电动机，全封闭式风扇冷却鼠笼式交流异步电动机，防护等级为IP55或IP54，绝缘等级为F级。带有可拆卸脚部的机筒由铝合金压铸而成。多种安装模式可用。Y2系列电动机具有效率高、节能、起动转矩大、性能优异、噪音低、振动小、可靠性高、操作和维护方便、安装尺寸和功率符合IEC标准等优点。

Y2系列电动机适用于普通场所和无特殊要求的简单机械，包括减速机、压缩机、泵、装配线、包装机、食品加工机械等。

Y2 series three-phase asynchronous electric motors, totally enclosed fan-cooled squirrel-cage AC asynchronous motors with IP55 or IP54 protection degree and class F insulation, have been lately developed with our own design. The motor with removable feet is made of aluminum-alloy casting. Various mounting mode is available. Y2 series electric motors have many advantages such as high efficiency, energy saving, large starting torque, excellent performance, low noise, low vibration, high reliability, convenient operation and maintenance, and the mounting dimension and power rate in conformity to the IEC standard, and so on.

Y2 series motors are suitable for ordinary places and simple machinery without special requirements, including, assembling line, packing machines, foodstuff processing machineries, etc.

DING YI MOTOR




技术数据 TECHNICAL DATA

型号 Type	功率 (KW)	电流 (A)	转速 Speed r/min	效率 Eff %	功率因素 Power Factor cos Φ	堵转转矩 额定转矩 Tst/Tn	堵转电流 额定电流 Ist/In	最大转矩 额定转矩 Tmax/Tn	噪声 (A)	重量 (KG)
Y2-63M1-2	0.18	0.53	2720	65.0	0.80	2.3	5.5	2.2	61	4.5
Y2-63M2-2	0.25	0.69	2720	68.0	0.81	2.3	5.5	2.2	61	4.7
Y2-71M1-2	0.37	1.01	2755	69.0	0.81	2.3	6.1	2.2	64	6
Y2-71M2-2	0.55	1.38	2790	74.0	0.82	2.3	6.1	2.3	64	6.3
Y2-80M1-2	0.75	1.77	2745	75.0	0.83	2.2	6.1	2.3	67	16
Y2-80M2-2	1.1	2.61	2835	76.2	0.87	2.2	6.9	2.3	67	17
Y2-90S-2	1.5	3.46	2850	78.5	0.84	2.2	7.0	2.3	72	20
Y2-90L-2	2.2	4.85	2855	81.0	0.85	2.2	7.0	2.3	72	23
Y2-100L-2	3	6.34	2860	82.6	0.87	2.2	7.5	2.3	76	30
Y2-112M-2	4	8.2	2880	84.2	0.88	2.2	7.5	2.3	77	41
Y2-132S1-2	5.5	11.1	2900	85.7	0.88	2.2	7.5	2.3	80	27.5
Y2-132S2-2	7.5	14.9	2900	87.0	0.88	2.2	7.5	2.3	80	60.5
Y2-160M1-2	11	21.2	2930	88.4	0.89	2.2	7.5	2.3	86	107
Y2-160M2-2	15	28.6	2930	89.4	0.89	2.2	7.5	2.3	86	114
Y2-160L-2	18.5	34.7	2930	90.0	0.90	2.2	7.5	2.3	86	133
Y2-63M1-4	0.12	0.44	1310	57	0.72	2.1	4.4	2.2	52	4.5
Y2-63M2-4	0.18	0.62	1310	60	0.73	2.1	4.4	2.2	52	4.7
Y2-71M1-4	0.25	0.79	1345	65	0.74	2.1	5.2	2.2	55	6
Y2-71M2-4	0.37	1.12	1340	67	0.75	2.1	5.2	2.2	55	6.3
Y2-80M1-4	0.55	1.57	1390	71	0.75	2.4	5.2	2.3	58	15
Y2-80M2-4	0.75	2.05	1380	73	0.76	2.3	6.0	2.3	58	15.5
Y2-90S-4	1.1	2.85	1390	76.2	0.77	2.3	6.0	2.3	61	19
Y2-90L-4	1.5	3.75	1400	78.5	0.78	2.3	6.0	2.3	61	23
Y2-100L1-4	2.2	5.09	1420	80	0.81	2.3	7.0	2.3	64	29
Y2-100L2-4	3	6.78	1410	82.6	0.82	2.3	7.0	2.3	64	31
Y2-112M-4	4	8.8	1435	84.2	0.82	2.3	7.0	2.3	65	41
Y2-132S-4	5.5	11.7	1440	85.7	0.83	2.3	7.0	2.3	71	63.5
Y2-132M-4	7.5	15.6	1450	87	0.84	2.3	7.0	2.3	71	72


外形及安装尺寸 DIMENSIONS(mm)

型号 Type	功率 (KW)	电流 (A)	转速 Speed r/min	效率 Eff %	功率因素 Power Factor cos Φ	堵转转矩 额定转矩 Tst/Tn	堵转电流 额定电流 Ist/In	最大转矩 额定转矩 Tmax/Tn	噪声 (A)	重量 (KG)
Y2-160M-4	11	22.5	1460	88.4	0.84	2.2	7.0	2.3	75	110
Y2-160L-4	15	30	1460	89.4	0.85	2.2	7.5	2.3	75	129
Y2-71M1-6	0.18	0.74	870	56	0.66	1.9	4.4	2.0	52	6
Y2-71M2-6	0.25	0.95	870	59	0.68	1.9	4.4	2.0	52	6.3
Y2-80M1-6	0.37	1.3	880	62	0.70	1.9	4.7	2.0	54	15
Y2-80M2-6	0.55	1.8	880	65	0.72	1.9	4.7	2.1	54	16
Y2-90S-6	0.75	2.29	905	69	0.72	2.0	5.3	2.1	57	20
Y2-90L-6	1.1	3.18	905	72	0.73	2.0	5.5	2.1	57	23
Y2-100L-6	1.5	4	920	76	0.72	2.0	5.5	2.1	61	29
Y2-112M-6	2.2	5.6	935	79	0.76	2.0	6.5	2.1	65	41
Y2-132S-6	3	7.4	960	81	0.76	2.1	6.5	2.1	69	59
Y2-132M1-6	4	9.75	960	82	0.76	2.1	6.5	2.1	69	66
Y2-132M2-6	5.5	12.9	960	84	0.77	2.1	6.5	2.1	69	76.5
Y2-160M-6	7.5	17.2	970	86	0.77	2.1	6.5	2.1	73	106
Y2-160L-6	11	24.5	970	87.5	0.78	2.1	6.5	2.1	73	122
Y2-80M1-8	0.18	0.83	645	51	0.61	1.9	3.3	1.9	52	15
Y2-80M2-8	0.25	1.1	645	54	0.61	1.9	3.3	1.9	52	16
Y2-90S-8	0.37	1.49	675	62	0.61	1.9	4	1.9	56	20
Y2-90L-8	0.55	2.17	680	63	0.61	2	4	2	56	23
Y2-100L1-8	0.75	2.43	680	70	0.67	2	4	2	59	29
Y2-100L2-8	1.1	3.36	680	72	0.69	2	5	2	59	31
Y2-112M-8	1.5	4.4	690	74	0.70	2	5	2	61	41
Y2-132S-8	2.2	6.0	710	79	0.71	2	6	2	64	61
Y2-132M-8	3	7.8	710	80	0.73	2	6	2	64	74
Y2-160M1-8	4	10.3	720	81	0.73	2	6	2	68	95.5
Y2-160M2-8	5.5	13.6	720	83	0.74	2	6	2	68	107
Y2-160L-8	7.5	17.8	720	85.5	0.75	2	6	2	68	128


B3

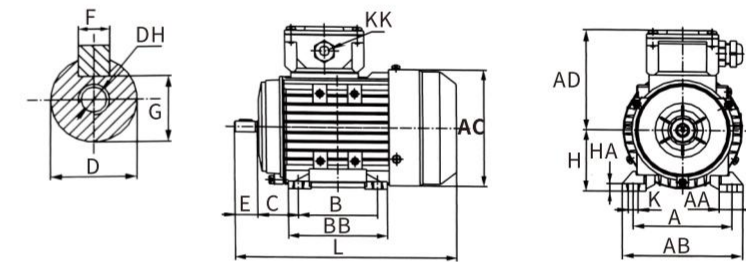

B35

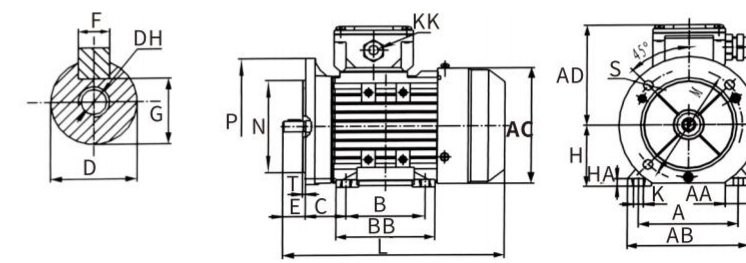


B5

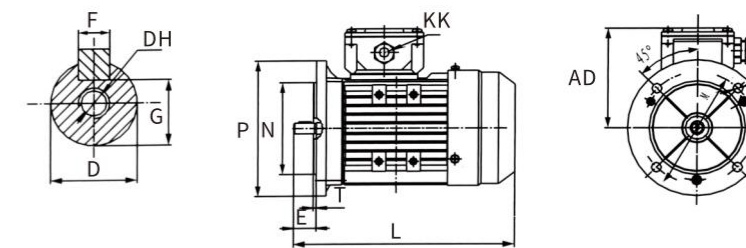

机座号 Frame size	安装尺寸 Mounting dimensions																	外形尺寸 Overall dimensions						
	A	AA	AB	BB	HA	AC	AD	B	C	D	DH	E	F	G	H	K	KK		L	M	N	P	S	T
	METRIC		PG																					
56	90	23	115	88	7	110	100	71	36	9	M4×12	20	3	7.2	56	5.8	2-M20×1.5	2-PG13.5	199	100	80	120	Φ7	3.0
63	100	24	135	100	7	120	109	80	40	11	M4×12	23	4	8.5	63	7.0	2-M20×1.5	2-PG13.5	217	115	95	140	Φ10	3.0
71	112	26	150	110	8	136	127	90	45	14	M5×12	30	5	11	71	7.0	2-M20×1.5	2-PG13.5	245	130	110	160	Φ10	3.5
80	125	35	165	125	9	155	134	100	50	19	M6×16	40	6	15.5	80	10.0	2-M25×1.5	2-PG16	287	165	130	200	Φ12	3.5
90S	140	37	175	125	10	175	140	100	56	24	M8×19	50	8	20.0	90	10.0	2-M25×1.5	2-PG16	315	165	130	200	Φ12	3.5
90L	140	37	175	150	10	175	140	125	56	24	M8×19	50	8	20.0	90	10.0	2-M25×1.5	2-PG16	340	165	130	200	Φ12	3.5
100L	160	40	200	172	11	196	160	140	63	28	M10×22	60	8	24.0	100	12.0	2-M32×1.5	2-PG21	385	215	180	250	Φ15	4.0
112M	190	41	230	181	12	220	178	140	70	28	M10×22	60	8	24.0	112	12.0	2-M32×1.5	2-PG21	400	215	180	250	Φ15	4.0
132S	216	51	260	186	15	259	206	140	89	38	M12×28	80	10	33.0	132	12.0	2-M32×1.5	2-PG21	483	265	230	300	Φ15	4.0
132M	216	51	260	224	15	259	206	178	89	38	M12×28	80	10	33.0	132	12.0	2-M32×1.5	2-PG21	510	265	230	300	Φ15	4.0
160M	254	55	320	260	18	315	255	210	108	42	M16×36	110	12	37.0	160	15.0	2-M40×1.5	2-PG29	615	300	250	350	Φ19	5.0
160L	254	55	320	304	18	315	255	254	108	42	M16×36	110	12	37.0	160	15.0	2-M40×1.5	2-PG29	670	300	250	350	Φ19	5.0

外形及安装尺寸 DIMENSIONS(mm)

B14

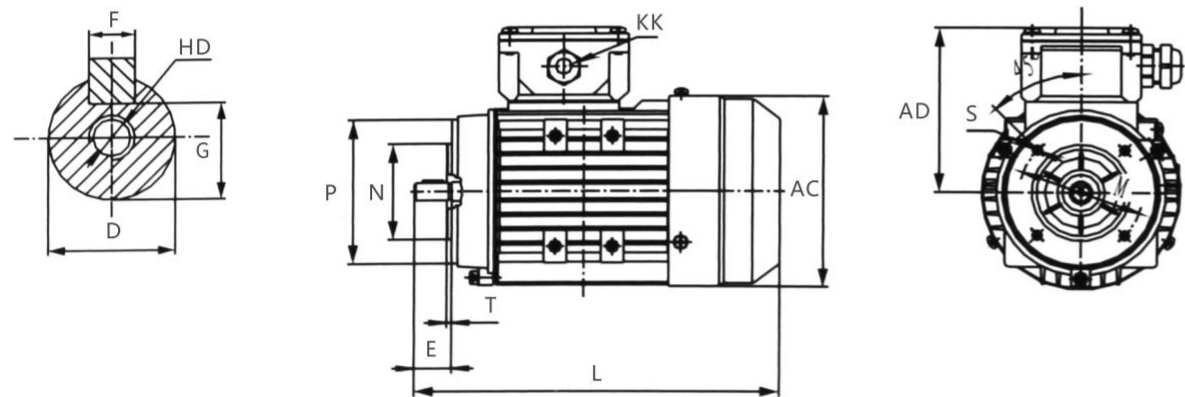

机座号 Frame size	安装尺寸 Mounting dimensions										外形尺寸 Mounting dimensions									
	AC	AD	D	DH	E	F	G	KK		L	B14A					B14B				
								METRIC	PG		M	N	P	S	T	M	N	P	S	T
56	110	100	9	M4×12	20	3	7.2	2-M20×1.5	2-PG13.5	199	65	50	80	M5	2.5	85	70	105	M6	2.5
63	120	109	11	M4×12	23	4	8.5	2-M20×1.5	2-PG13.5	217	75	60	90	M5	2.5	100	80	120	M6	2.5
71	136	127	14	M5×12	30	5	11.0	2-M20×1.5	2-PG13.5	245	85	70	105	M6	2.5	115	95	140	M8	3.0
80	155	134	19	M6×16	40	6	15.5	2-M25×1.5	2-PG16	297	100	80	120	M6	3.0	130	110	160	M8	3.5
90S	175	140	24	M8×19	50	8	20.0	2-M25×1.5	2-PG16	315	115	95	140	M8	3.0	130	110	160	M8	3.5
90L	175	140	24	M8×19	50	8	20.0	2-M25×1.5	2-PG16	340	115	95	140	M8	3.0	130	110	160	M8	3.5
100L	196	160	28	M10×22	60	8	24.0	2-M32×1.5	2-PG21	385	130	110	160	M8	3.5	165	130	200	M10	3.5
112M	220	178	28	M10×22	60	8	24.0	2-M32×1.5	2-PG21	400	130	110	160	M8	3.5	165	130	200	M10	3.5
132S	259	206	38	M12×28	80	10	33.0	2-M32×1.5	2-PG21	483	165	130	200	M10	3.5	215	180	250	M12	4.0
132M	259	206	38	M12×28	80	10	33.0	2-M32×1.5	2-PG21	510	165	130	200	M10	3.5	215	180	250	M12	4.0
160M	315	255	42	M16×36	110	12	37.0	2-M40×1.5	2-PG29	615	215	180	250	M12	4.0	265	230	300	M16	5.0
160L	315	255	42	M16×36	110	12	37.0	2-M40×1.5	2-PG29	670	215	180	250	M12	4.0	265	230	300	M16	5.0

本公司可按客户需求（请提供图纸）生产各种电机。
The company can produce all kinds of motors according to customers'needs (please provide drawings).

YCL 系列双值电容异步电动机 Series double value capacitor asynchronous motor



产品概述 PRODUCT OVERVIEW

应用: 空压机、水泵、风扇、制冷器、医疗设备和小型机械等。

特点: 结构紧凑，低噪音、起动性能好，运行平稳，通用性能强。

Application: Air compressors, pumps, fans, coolers, medical equipment and small machinery etc.


Features: low noise, compact construction, outstanding performance of starting and operation.

技术数据 TECHNICAL DATA

型号 Type	功率Output		电压 Voltage (V)	电流 Current (A)	转速 Speed (r/min)	效率 Eff (%)	功率因素 Power Factor $\cos\phi$	堵转转矩 额定转矩 Tst/Tn	堵转电流 额定电流 Ist/In	最大转矩 最大转矩 Tmax/Tn
	HP	KW								
YCL80a-2	1/2	0.37	220	3.7	2880	62	0.73	2.8	6.5	1.8
YCL80b-2	3/4	0.55	220	5.3	2880	65	0.73	2.8	6.5	1.8
YCL80c-2	1	0.75	220	6.7	2880	68	0.75	2.8	6.5	1.8
YCL90s-2	1.5	1.1	220	9.1	2880	71	0.77	2.4	7.0	1.8
YCL90L-2	2	1.5	220	12.1	2880	72	0.78	2.4	7.0	1.8
YCL100L-2	3	2.2	220	17.1	2900	74	0.79	2.1	7.0	1.8
YCL112M1-2	4	3	220	21.4	2900	76	0.84	2.2	7.0	1.8
YCL112M2-2	5	3.7	220	24.8	2900	79	0.86	2.2	7.0	1.8
YCL80a-4	1/3	0.25	220	3.4	1450	56	0.60	2.8	6	1.8
YCL80b-4	1/2	0.37	220	4.5	1450	60	0.62	2.8	6	1.8
YCL80c-4	3/4	0.55	220	6.0	1450	64	0.65	2.8	6	1.8
YCL90S-4	1	0.75	220	7.7	1450	67	0.66	2.4	6.5	1.8
YCL90L-4	1.5	1.1	220	10.5	1450	70	0.68	2.4	6.5	1.8
YCL100L-4	2	1.5	220	13.5	1450	72	0.70	2.4	6.5	1.8
YCL112M-4	3	2.2	220	19.3	1450	72	0.72	2.2	6.5	1.8
YCL132SA-4	4	3	220	25.2	1450	74	0.73	2.1	6.5	1.8
YCL132SB-4	5	3.7	220	30	1450	75	0.74	2.1	6.5	1.8
YCL132M-4	7.5	5.5	220	32.5	1450	81	0.95	2.1	6.5	1.8

外形及安装尺寸 DIMENSIONS(mm)

B3

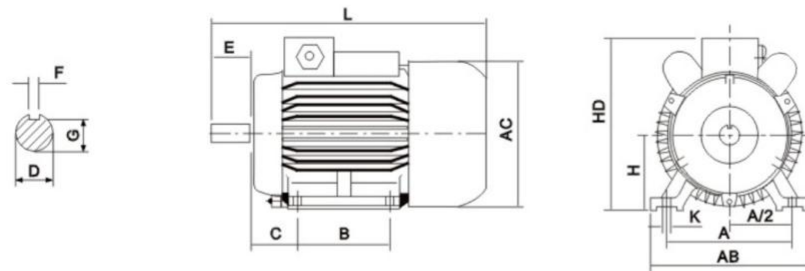

机座号 frame size	安装尺寸 Mounting dimensions										外形尺寸 Outline dimensions			
	A	A/2	B	C	D	E	F	G	H	K	AB	AC	HD	L
71	112	56	90	45	14	30	5	11	71	7	145	145	180	255
80	125	62.5	100	50	19	40	6	15.5	80	10	160	165	200	295
90S	140	70	100	56	24	50	8	20	90	10	180	185	220	370
90L	140	70	125	56	24	50	8	20	90	10	180	185	220	400
100L	160	80	140	63	28	60	8	24	100	12	205	200	260	430
112M	190	95	140	70	28	60	8	24	112	12	245	250	300	455
132S	216	108	140	89	38	80	10	33	132	12	280	290	350	525
132M	216	108	178	88	38	80	10	33	132	12	280	290	350	565


YL 系列双值电容异步电动机
 Series double value capacitor asynchronous motor

产品概述 PRODUCT OVERVIEW

应用：空压机、水泵、风扇、制冷器、医疗设备和小型机械等。
 特点：结构紧凑，低噪音、起动性能好，运行平稳，通用性能强。


Application: Air compressors, pumps, fans, coolers, medical equipment and small machinery etc.
Features: low noise, compact construction, outstanding performance of starting and operation.

技术数据 TECHNICAL DATA


型号 Type	功率 Power (KW)	额定电流 Rated current (A)	转速 Speed r/min	效率 Eff%	功率因素 Power Factor $\cos\phi$	堵转转矩 额定转矩 Tst/Tn	堵转电流 LST A
YL711-2	0.37	2.2	2800	67	0.92	1.8	16
YL712-2	0.55	3.9	2800	70	0.92	1.8	21
YL801-2	0.75	4.9	2800	72	0.95	1.8	29
YL802-2	1.1	7	2800	75	0.95	1.8	40
YL90S-2	1.5	9.4	2800	76	0.95	1.7	55
YL90L-2	2.2	13.7	2800	77	0.95	1.7	80
YL100L1-2	3	18.2	2800	79	0.95	1.7	110
YL112M-2	4	26.6	2850	77	0.82	2.2	175
YL132S-2	4	27.5	2800	79	0.86	1.7	180
YL132M-2	5.5	32.5	2800	81	0.95	1.7	230
YL711-4	0.25	2	1400	62	0.92	1.8	12
YL712-4	0.37	2.8	1400	65	0.92	1.8	16
YL801-4	0.55	4	1400	68	0.92	1.8	21
YL802-4	0.75	5.1	1400	71	0.92	1.8	29
YL90S-4	1.1	7.3	1400	73	0.95	1.7	40
YL90L-4	1.5	9.7	1400	75	0.95	1.7	55
YL100L1-4	2.2	13.9	1400	76	0.95	1.7	80
YL112M-4	3	18.6	1400	77	0.95	1.7	110
YL132S-4	4	27.1	1400	78	0.77	2.2	175
YL132M-4	5.5	31.2	1400	78	0.95	2.2	230

外形及安装尺寸 DIMENSIONS(mm)


B3

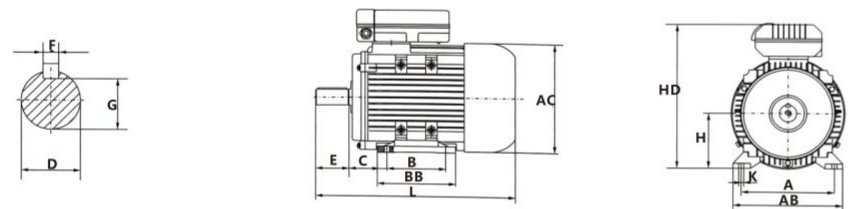


B5

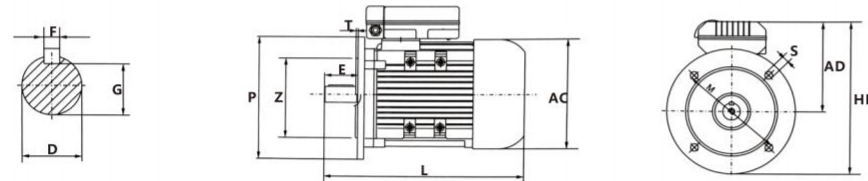


B35

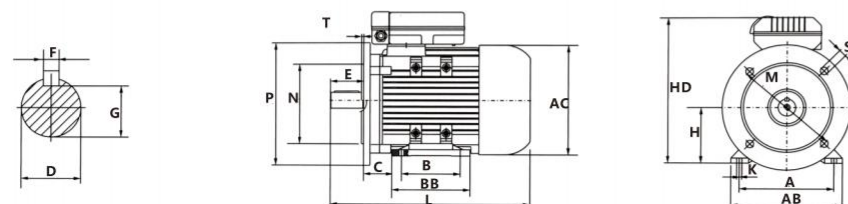


B34

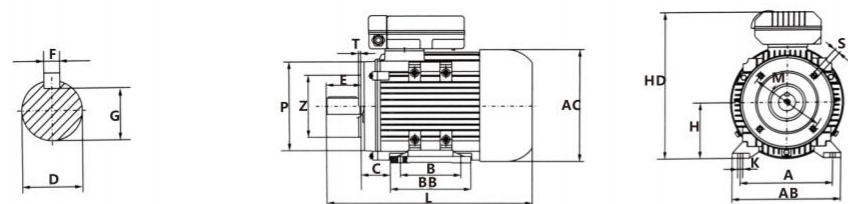

B14

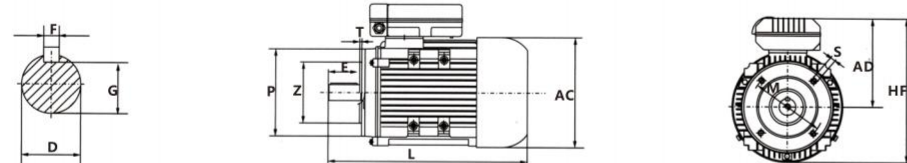

机座号 frame size	安装尺寸 Mounting dimensions														外形尺寸 Outline dimensions															
	A	A/2	B	C	D	E	F	G	ED	GD	H	K	IM B14 B34				IM B5B35				AB	AC	AE	AD	HD	L				
	M	N	P	R	S	T	M	N	P	R	S	T																		
71	112	56	90	45	14	30	5	11	22	5	71	7	85	70	105	0	M6	2.5	130	110	160	0	10	3.5	145	145	95	180	180	255
80	125	62.5	100	50	19	40	6	15.5	32	6	80	10	100	80	120	0	M6	3	165	130	200	0	12	3.5	160	165	110	200	220	295
90S	140	70	100	56	24	50	8	20	32	7	90	10	115	95	140	0	M8	3	165	130	200	0	12	3.5	180	185	120	220	240	370
90L	140	70	125	56	24	50	8	20	32	7	90	10	115	95	140	0	M8	3	165	130	200	0	12	3.5	180	185	120	220	240	400
100L	160	80	140	63	28	60	8	24	40	8	100	12	-	-	-	-	-	-	215	180	250	0	15	4	205	200	130	260	-	430
112M	190	95	140	70	28	60	8	24	40	8	112	12	-	-	-	-	-	-	215	180	250	0	15	4	245	250	140	300	-	455
132S	216	108	140	89	38	80	10	33	56	10	132	12	-	-	-	-	-	-	265	230	300	0	15	4	280	290	155	350	-	525
132M	216	108	178	88	38	80	10	33	56	10	132	12	-	-	-	-	-	-	265	230	300	0	15	4	280	290	155	350	-	565

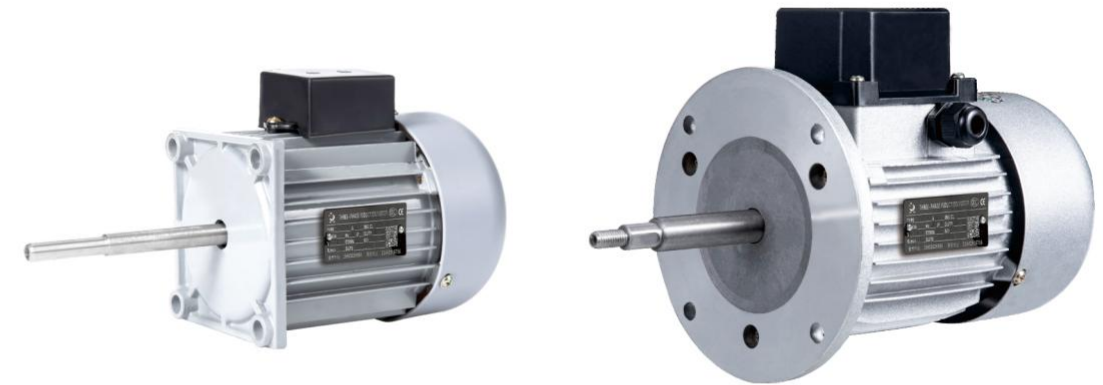

YY 系列电容运转异步电动机 Series capacitor operated asynchronous motor

产品概述 PRODUCT OVERVIEW

YY系列电动机按国家标准JB/T1012要求设计制造。具有电气性能优良、体积小、振动小、维护方便等优点。广泛用于轻负荷起动的小型机械及家用动力如洗衣机、脱水机及水泵机械等作为动力。


YY series motors are designed and manufactured according to the requirements of national standard JB/T1012. It has the advantages of excellent electrical performance, small volume, small vibration, convenient maintenance and so on. Small machinery and household power widely used for light load starting, such as washing machines, dehydrators and water pump machinery, are used as power.

技术数据 TECHNICAL DATA


型号 Type	功率 Power (KW)	额定电流 Rated Current (A)	转速 Speed r/min	效率 Eff %	功率因素 Power Factor cos Φ	堵转转矩 额定转矩 Tst/Tn	堵转电流 额定电流 Ist/In	最大转矩 额定转矩 Tmax/Tn
YY7112	0.37	2.73	2800	67	0.92	0.35	10	1.7
YY7122	0.55	3.88	2800	70	0.92	0.35	15	1.7
YY8012	0.75	5.15	2800	72	0.92	0.32	20	1.7
YY8022	1.1	7.02	2800	75	0.95	0.32	30	1.7
YY90S-2	1.5	9.44	2800	76	0.95	0.3	45	1.7
YY90L-2	2.20	13.68	2800	77	0.95	0.3	65	1.7
YY100L1-2	3.0	18.2	2870	79	0.95	0.3	100	1.7
YY100L2-2	3.7	22.1	2870	80	0.95	0.3	120	1.7
YY7114	0.25	2.02	1400	61	0.92	0.35	7	1.7
YY7124	0.37	2.95	1400	62	0.92	0.4	10	1.7
YY8014	0.55	4.25	1400	64	0.92	0.32	15	1.7
YY8024	0.75	5.45	1400	68	0.92	0.32	20	1.7
YY90S-4	1.1	7.41	1400	71	0.95	0.3	30	1.7
YY90L-4	1.5	9.83	1400	73	0.95	0.3	45	1.7
YY100L1-4	2.2	13.9	1400	75	0.96	0.3	65	1.7
YY100L2-4	3.0	18.4	1400	77	0.96	0.3	100	1.7

外形及安装尺寸 DIMENSIONS(mm)


B3

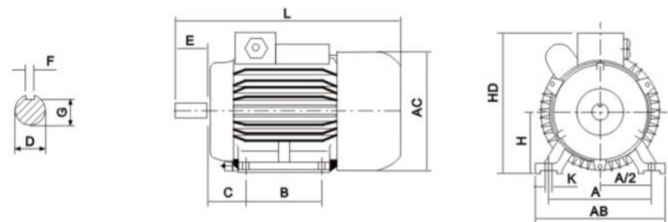


B35

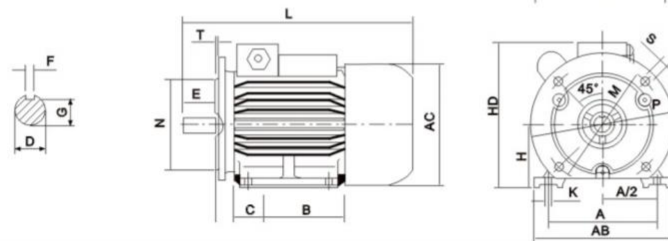


B5

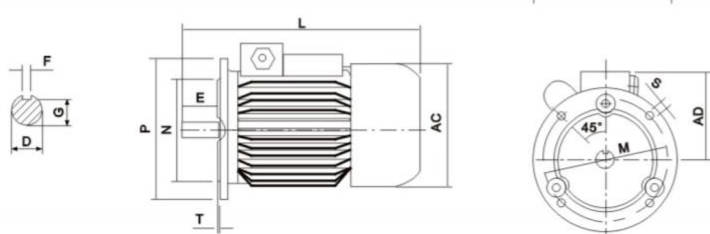

B14

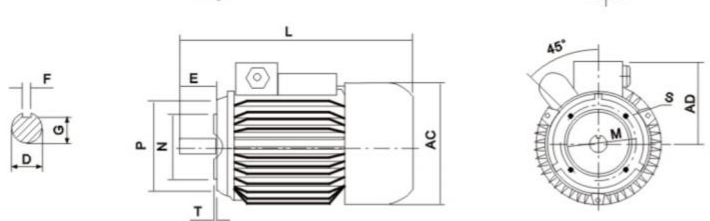

B34

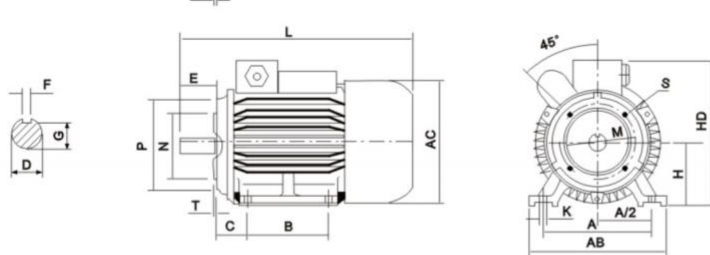

机座号 frame size	安装尺寸 Mounting dimensions														外形尺寸 OutLine dimensions													
	A	A/2	B	C	D	E	F	G	H	K	IM B14 B34						IM B5B35				AB	AC	AD	AE	HD	L		
											M	N	P	R	S	T	M	N	P	R							S	T
71	112	56	90	45	14	30	5	11	71	7	85	70	105	0	M6	2.5	130	110	160	0	10	3.5	145	145	140	95	180	255
80	125	62.5	100	50	19	40	6	15.5	80	10	100	80	120	0	M6	3	165	130	200	0	12	3.5	160	165	150	110	200	295
90S	140	70	100	56	24	50	8	20	90	10	115	95	140	0	M8	3	165	130	200	0	12	3.5	180	185	160	120	220	370
90L	140	70	125	56	24	50	8	20	90	10	115	95	140	0	M8	3	165	130	200	0	12	3.5	180	185	160	120	220	400
100L	160	80	140	63	28	60	8	24	100	12	-	-	-	-	-	-	215	180	250	0	15	4	205	200	180	130	260	430
112M	190	95	140	70	28	60	8	24	112	12	-	-	-	-	-	-	215	180	250	0	15	4	245	250	190	140	300	455
132S	216	108	140	89	38	80	10	33	132	12	-	-	-	-	-	-	265	230	300	0	15	4	280	290	210	155	350	525
132M	216	108	178	88	38	80	10	33	132	12	-	-	-	-	-	-	265	230	300	0	15	4	280	290	210	155	350	565

STRONG POWER OF PURE COPPER

风机电机 纯铜动力强劲



低功耗



快速散热



底噪运动



工作稳定